




Assembly Overview AeroWing

EGM winch motors mounted in the middle of the side wall




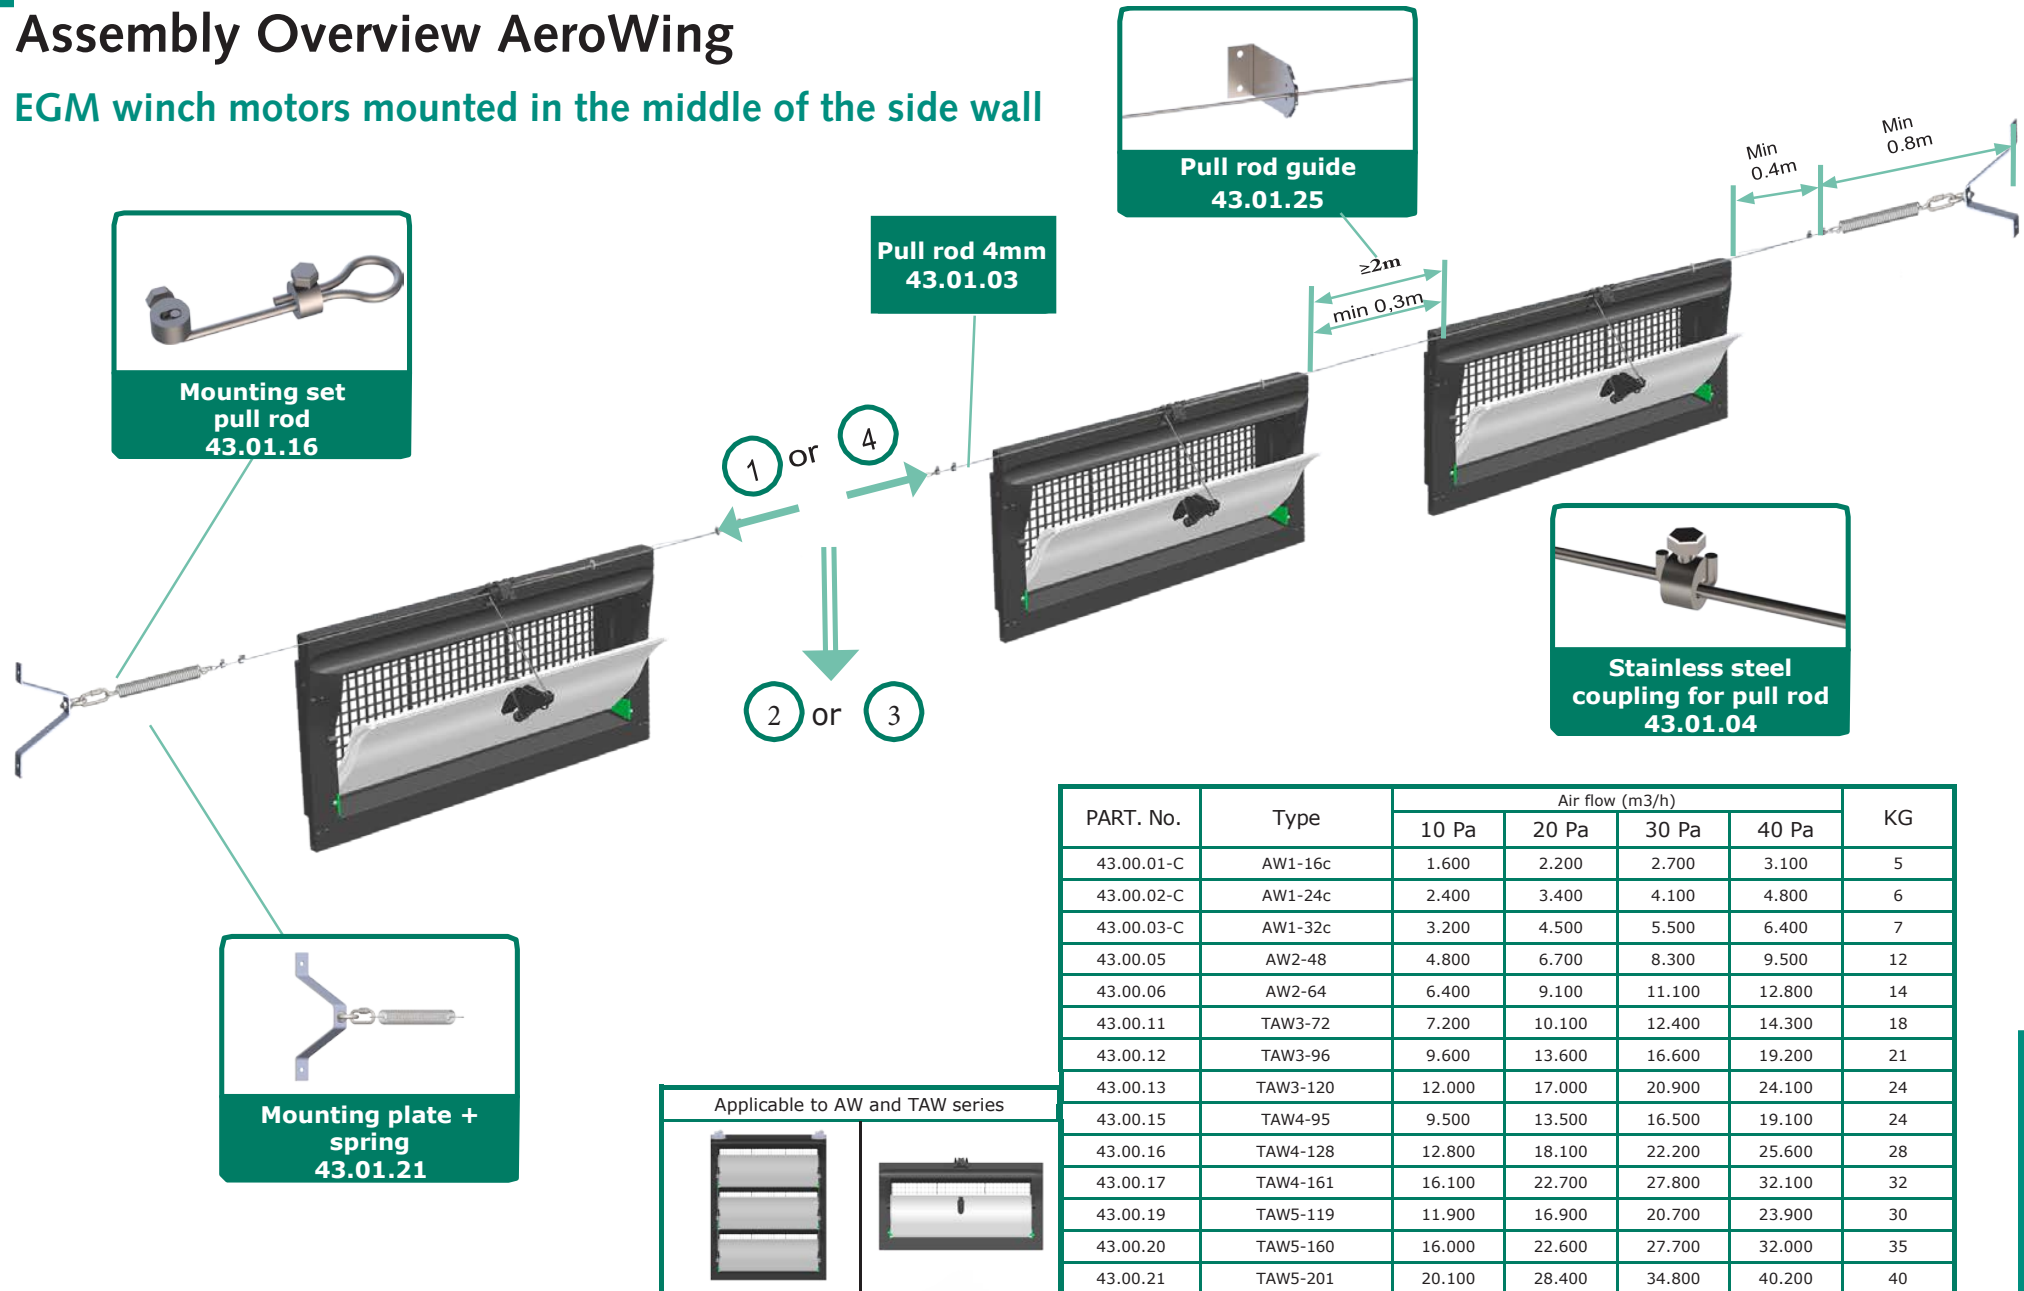


Assembly Overview AeroWing

EGM winch motors mounted in the middle of the side wall

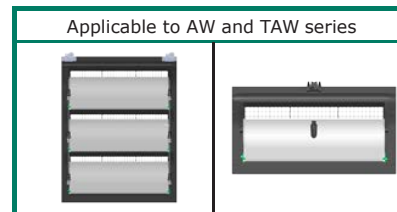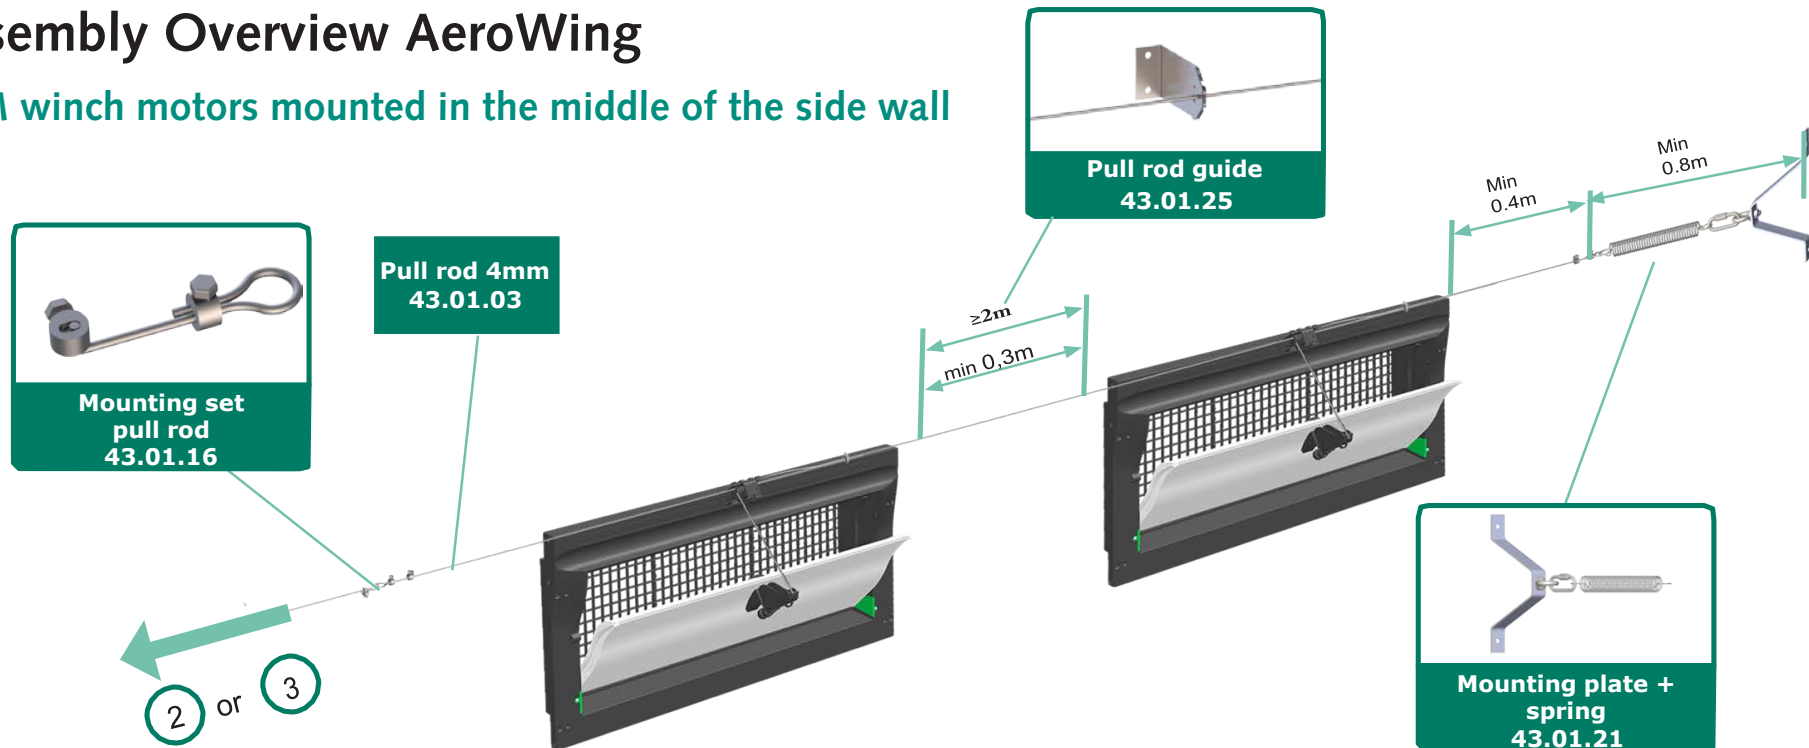

ART.No.	Type	Air flow (m3/h)				KG
		10 Pa	20 Pa	30 Pa	40 Pa	
43.00.01-C	AW1-16c	1.600	2.200	2.700	3.100	5
43.00.02-C	AW1-24c	2.400	3.400	4.100	4.800	6
43.00.03-C	AW1-32c	3.200	4.500	5.500	6.400	7
43.00.05	AW2-48	4.800	6.700	8.300	9.500	12
43.00.06	AW2-64	6.400	9.100	11.100	12.800	14
43.00.11	TAW3-72	7.200	10.100	12.400	14.300	18
43.00.12	TAW3-96	9.600	13.600	16.600	19.200	21
43.00.13	TAW3-120	12.000	17.000	20.900	24.100	24
43.00.15	TAW4-95	9.500	13.500	16.500	19.100	24
43.00.16	TAW4-128	12.800	18.100	22.200	25.600	28
43.00.17	TAW4-161	16.100	22.700	27.800	32.100	32
43.00.19	TAW5-119	11.900	16.900	20.700	23.900	30
43.00.20	TAW5-160	16.000	22.600	27.700	32.000	35
43.00.21	TAW5-201	20.100	28.400	34.800	40.200	40

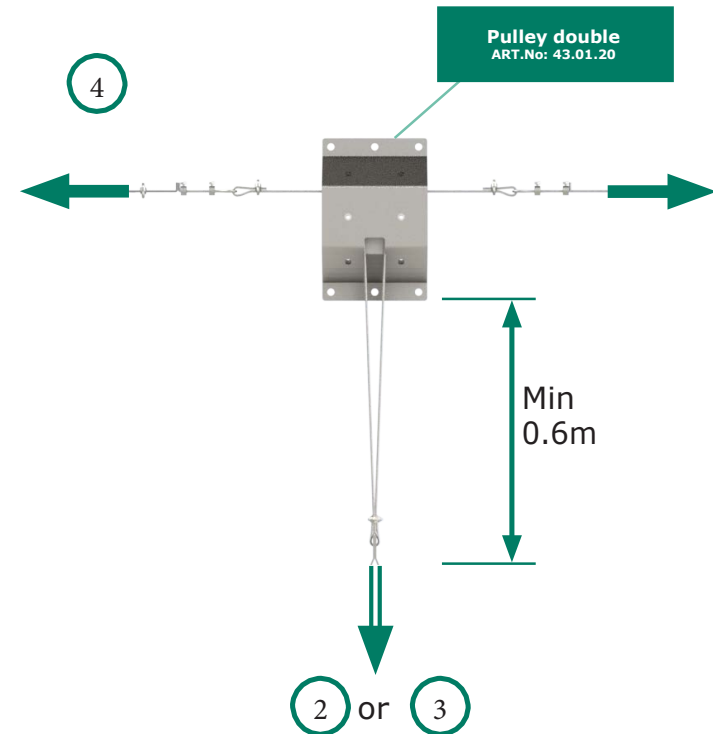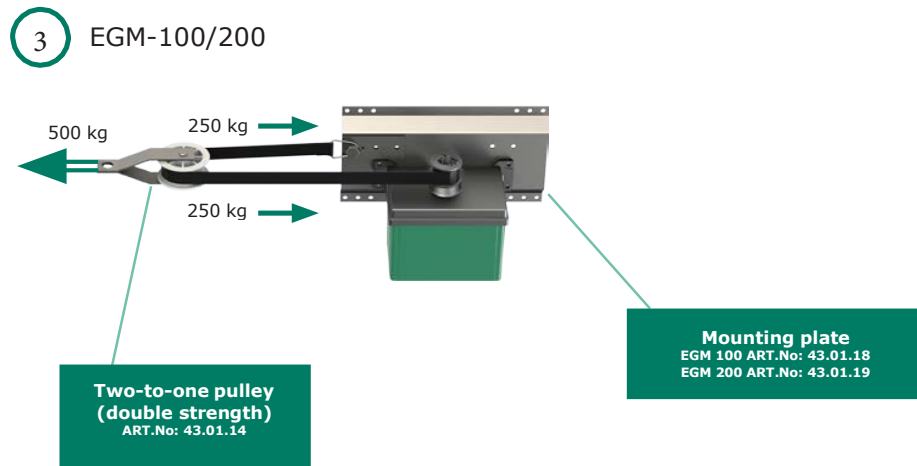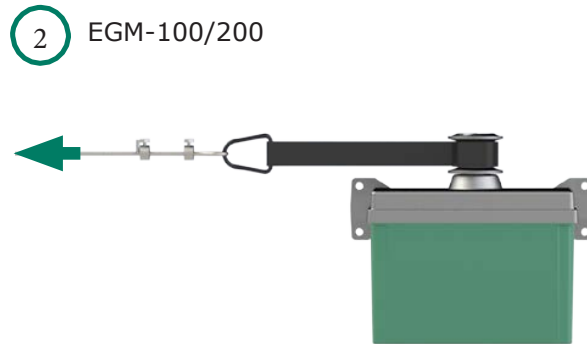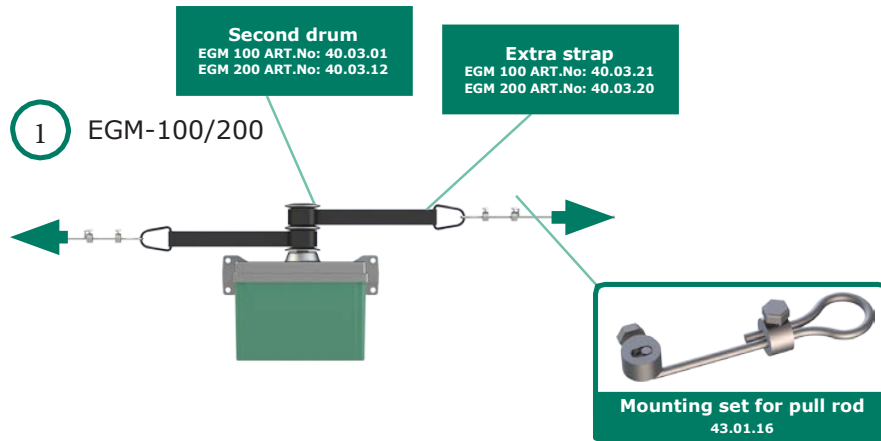

Type	Max. strength	Winding range
EGM-100	100 kg	min. 13 cm max. 68 cm
EGM-200	250 kg	min. 16 cm max. 80 cm